

| Optional Equipment | Note |
|-------------------------------------|--|
| Engine | Volvo TAD1643 |
| Heating type body | Engine exhaust gas heating structure |
| Low-temperature start-up system | Suitable for extremely low temperature regions |
| Cruise Speed Control | Suitable for long transport distance condition |
| Chain type stone deflector | Clearing of stones from rear tires |
| 360° Full View Monitor System | For wraparound safety of the truck |
| Enlarged body | Suitable for lighter weight material |
| Wear-resistant truck body liners | Suitable for very abrasive material |
| Automatic fire-extinguishing system | Automatic fire extinguishing for engine and rear axle case |
| Tire pressure monitor | Realtime tire pressure and temperature monitoring |

HEAVY EQUIPMENT Sp. Z O. O.

Address: UL. MAZOWIECKA 11 /49, 00-052 WARSZAWA,
POLAND UL. KORFANTEGO 138A, 40-156 KATOWICE, POLAND
Tel.: +48 575 156 769, +48 452 900 033
Website: www.hesanyi.com
E-mail: info@sanyi.com, poland.sanyi@gmail.com

SANY HEAVY EQUIPMENT CO., LTD

Address: 16 Kaifa Road, Economic & Technological Development Zone,
Shenyang, Liaoning Province, P.R.China.
Postal Code: 110027
Official Website: www.sanyglobal.com
E-mail: guanqb@sany.com.cn
Customer Service Hotline | Tel: 0086 - 400 6098 318

Reminder:
Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice. The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail. Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.



OFF-HIGHWAY MINING TRUCK

SET240S

DIESEL ELECTRIC POWER



Nominal Payload
220tonnes/240tons

Gross Vehicle Weight (GVW) up to
390tonnes/410tons

Gross Power
≥ 2,091kW


Technical Data

| Overall Parameters | Unit | Value |
|-------------------------------------|---------------------------------|---|
| Overall dimensions: L × W × H | mm/in | 14,900×8,200×7,050(13,800) /587×323×278(543) |
| Wheelbase | mm/in | 6,300/248 |
| Front track width | mm/in | 6,380/251 |
| Rear track width | mm/in | 5,340/210 |
| Ground clearance | mm/in | 680/27 |
| Max. steering angle of front wheels | ° | 42 |
| Min. steering radius | mm/in | 14,500/571 |
| Gross power | kW/hp | ≥2,091/2,803 |
| Max. speed | km/h/ mph | 65/40 |
| Max. Gradeability | % | 30 |
| Struck SAE | m ³ /yd ³ | 105/137 |
| Heaped SAE 2:1 | m ³ /yd ³ | 147/192 |

Weight Distribution

| Axle Load | Front Axle | Rear Axle |
|-----------|------------|-----------|
| Unloaded | 51% | 49% |
| Loaded | 33% | 67% |

Overall Dimensions

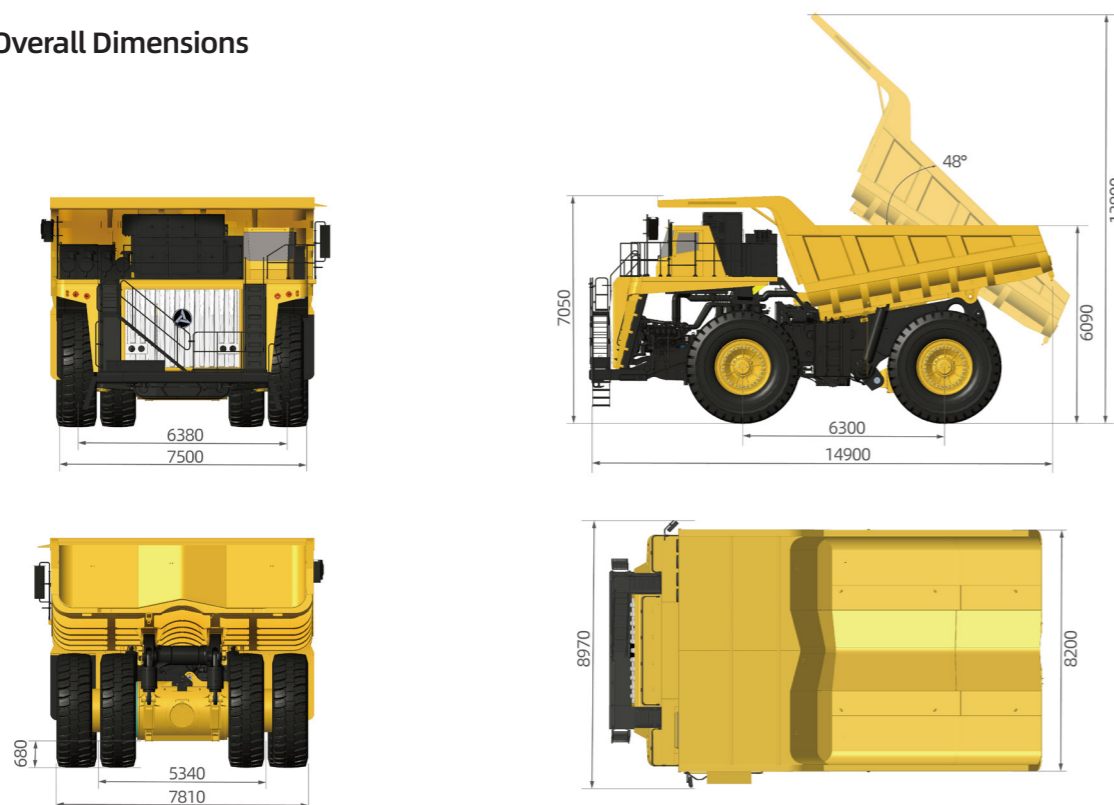

Dimension Unit:mm

* Dimensions may vary due to different configurations. The specific parameters are subject to actual conditions.

Fluid Capacities

| Fluid Capacities | L |
|---|-------|
| Engine crankcase and filter (engine oil) | 46×3 |
| Hydraulic oil tank (Sany exclusive) | 750 |
| Engine cooling system (antifreeze) | 258 |
| Battery cooling system (antifreeze) | 12 |
| Fuel tank (diesel) | 2,500 |
| Front suspension system (engine oil) | 72×2 |
| Rear suspension system (engine oil) | 43×2 |
| Motorized wheel reducer of rear axle (gear oil) | 40×2 |

Weight Parameters

| Item | kg | lb |
|----------------------|---------|---------|
| Chassis, with hoists | 138,200 | 305,000 |
| Body, standard | 31,800 | 70,000 |
| Net weight | 170,000 | 375,000 |
| Rated payload | 220,000 | 485,000 |
| Max. gross weight | 390,000 | 860,000 |

* The maximum gross vehicle weight (GVW) includes optional equipment, all accessories, fully filled fuel tank, loadings, etc; Overload will seriously deteriorate the lives of the components and the truck!

Main Configurations

Engine × 3

- Model: Weichai WP17;
- Type: 4-cycle, turbocharged, intercooled;
- Rated power: 565kW/1,900rpm;
- Max. torque: 3,000Nm/1,500rpm;
- Number/type of cylinders: 8/V shape, turbocharged;
- Bore stroke: Φ127mm×165mm/Φ5"×6.5";
- Displacement: 16.72L/1020in³.

Electric Drive System

- Alternator: 3×560KVA;
- Traction motor: 2×800/1250kW;
- Wheel reduction ratio: 31.875:1;
- Control module: tPower-TI84.240/CJPR3;
- Battery pack: 79.5KWh;
- Max. travel speed: 65km/h/40mpf;
- Note: The performance of drive system depends on the gross vehicle weight, gradient and length of transport road, rolling resistance, engine power, and other parameters. The drive system can adjust to the actual working conditions to realize the optimal performance of the mining dump truck.

Brakes

- Front: Single disc per side, four caliper per disc;
- Dia. of brake disc: 1,168mm(46in);
- Total area of brake lining: 3,922cm²(608in²);
- Rear: Dual disc per side, dual caliper per disc;
- Dia. of brake disc: 635mm(25in);
- Total area of brake lining: 2,632cm²(408in²);
- Service brake: All hydraulic brake system control. Transmission PTO mounted pressure compensating piston pump provides hydraulic pressure for brakes and steering. Independent circuits front and rear. Each circuit incorporates accumulator which stores energy to provide instant braking response;
- Parking brake: Rear brakes applied by spring loaded opposing piston on disc pack, hydraulically released;
- Loading brake: Switch on/off to control;
- Emergency brake: The service brake is automatically applied when the pressure of hydraulic system is below the set value;
- Max. power of electric brake: 2,920kW(3,971hp);
- Max. rated power of continuous braking: 2,500kW(3,400hp);
- The electric brake is equipped with continuous air-cooled resistance grid, electric retarder brake, loading brake, and standard reversing brake system;
- The brake systems conform to the requirements of ISO3450.

Steering

- Independent hydraulic steering with closed-center steering valve, pressure compensating piston pump and accumulator. Accumulator provides uniform steering regardless of engine speed. In the event of loss of engine power, it provides emergency power to system for steering;
- Min. turning radius: 14,500mm;
- The steering system meets the SAE1151/5010 standard.

Frame

- Dual variable-section box structures welded from high-strength alloy steel plates and steel castings, integrated with the FOPS/ROPS structures to achieve excellent bending capacity, strong distortion resistance, endurant impact ductility and extended life.

Suspension

- Independent front suspension. The smaller swing arm motion reduces the lateral displacement of tires and prolongs the lives of tires. It features extended life and maintenance period.
- Front suspension travel: 350mm(13.78 in);
- Rear suspension travel: 300mm(11.81in).

Hoist

- Independently hydraulic system with retarders at limiting positions. Two 3-section hoist cylinders are mounted on both sides of the frame rails to keep stable of body while raises the body.
- Body hydraulic pump flow rate:(1,700rpm)2×410L/min (216USgal/min);
- Liftings ≤ 22s, Lowerings ≤ 23s.

Body

- The body is W-shape structures. The side plates are constructed from extra wide high tensile strength abrasion-resistant steel. The body is highly impact resistance and needs lower load height. Tilted angle 49°;
- Standard thickness:
Floor: 20mm; Side: 12mm; Front: 16mm;
- Struck: 105m³(137.4yd³);
- Heaped 2:1 (SAE std): 147m³(192.3yd³).

Cab

- FOPS/ROPS certified. Equipped with integral four-pillar tipping protection design, adjustable cushioned seat, luxury upholstery, and tiltable and telescopic steering wheel to provide a comfortable operating space;
- The cab conforms to the requirements of ISO 3471. The cab provides a sound exposure Leq (equivalent sound level) of less than 78 dB(A) when tested with doors and windows closed.

Tires

- Standard: 40.00R57;
- Specification of wheel rim: 57-29.00/6.0;
- Under certain working conditions, TKPH(ton-Km/h) capabilities of standard tires could be exceeded. Please kindly consult tire manufacturers for optimum tire selection.

Other Standard Equipment

- Automatic lubrication system;
- Automatic weighing system;
- Fast fuel fill;
- Engine muffler.