

OFF-HIGHWAY MINING TRUCK SKT130S

Optional Equipment	Note
ASR	Traction control system
Tire pressure monitor	Realtime tire pressure and temperature monitoring
Fast fuel fill	Rapid refueling saves time and cost
Automatic lubrication system	For regular grease filling in a specified amount
Automatic weighing system	Real-time loaded weight monitoring
Full LCD instrument cluster	Clearly displaying the data content
12.1" touch screen	Large-screen display for convenient operation



HEAVY EQUIPMENT Sp. Z O. O.

Address: UL. MAZOWIECKA 11 /49, 00-052 WARSZAWA, POLAND
 UL. KORFANTEGO 138A, 40-156 KATOWICE, POLAND
 Tel.: +48 575 156 769, +48 452 900 033
 Website: www.hesanyi.com
 E-mail: info@hesanyi.com, poland.sanyi@gmail.com

SANY HEAVY EQUIPMENT CO., LTD

Address: 16 Kaifa Road, Economic & Technological Development Zone,
 Shenyang, Liaoning Province, P.R.China.
 Postal Code: 110027
 Official Website: www.sanyglobal.com
 E-mail: guanqb@sany.com.cn
 Customer Service Hotline | Tel: 0086 - 400 6098 318

Reminder:
 Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice. The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail. Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.



Nominal Payload
90tonnes/99tons

Gross Vehicle Weight (GVW) up to
144tonnes/159tons

Gross Power
875kW


Technical Data

Overall Parameters	Unit	Value
Overall dimensions: L x W x H	mm/in	11,500x5,750x4,950(9,910) 453x226x195(390)
Wheelbase	mm/in	4,150/163
Front track width	mm/in	3,450/136
Rear track width	mm/in	3,220/127
Ground clearance	mm/in	450/18
Max. steering angle of front wheels	°	40
Min. steering radius	mm/in	13,000/512
Gross power	kW/hp	565+110+200 /758+148+268
Battery capacity	kW/h	128
Max. speed	km/h/ mph	42
Max. Gradeability	%	>30
Struck SAE	m ³ /yd ³	44/58
Heaped SAE 2:1	m ³ /yd ³	61/80
Axle	t	35+55+55

Weight Distribution

Axle Capacity	Front Axle	Rear Axle
Unloaded	42%	58%
Loaded	21%	79%

Overall Dimensions

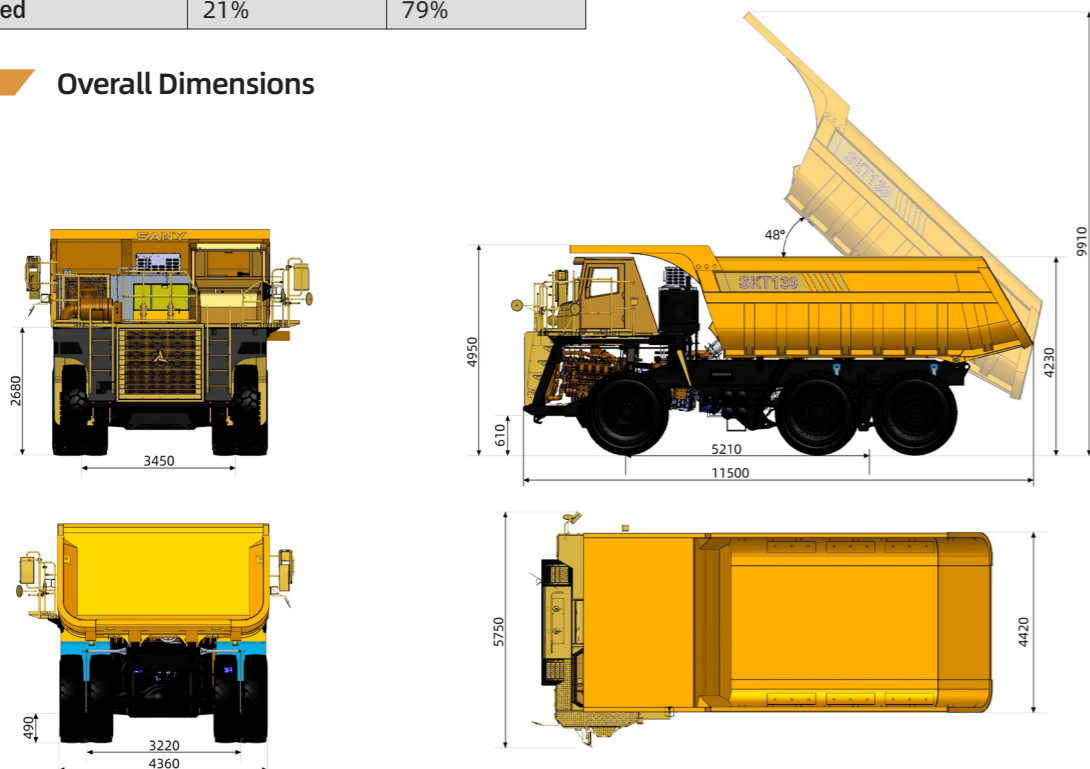

Dimension Unit:mm

* Dimensions may vary due to different configurations. The specific parameters are subject to actual conditions.

Fluid Capacities

Fluid Capacities	L
Engine (engine oil)	44
Cooling system (antifreeze)	85
Hydraulic oil tank (hydraulic oil)	290
Intermediate/rear axle (gear oil)	216
Transmission (transmission oil)	34
Motor - battery (coolant)	30

Weight Parameters

Item	kg	lb
Net weight	54,000	119,050
Rated payload	90,000	198,416
Max. gross weight	144,000	317,466

* The maximum gross vehicle weight (GVW) includes optional equipment, all accessories, fully filled fuel tank, loadings, etc; Overload will seriously deteriorate the lives of the components and the truck!

Main Configurations

Engine

- Model: Weichai WP17G770E304;
- Type: high pressure common rail, turbocharged intercooled;
- Rated power: 565kW/1900rpm;
- Max. torque: 3000Nm/1200rpm ~ 1600rpm;
- Number/type of cylinders: 8/V shape, turbocharged;
- Cylinder bore x stroke: Φ127mmx165mm/Φ5"×6.5";
- Displacement: 16.72L.

Drive Motor

Electric drive system	Rated/peak power kW	Rated/peak torque Nm	Max. speed rpm
IM	140/310	900/2,300	3,600
TM	200/350	1,100/2,500	3,600

Brakes

- Front brake: Single caliper disc brake;
- Intermediate/rear brake: Double caliper disc brake;
- Brake disc diameter: 680mm(26.8");
- Service brake: Front/rear independent double-circuit air brake system, with large-capacity air reservoir and large displacement air brake valve for short brake response time;
- Parking brake: spring applied;
- Loading brake: switch control;
- Maximum power of electric braking: 560kW(751hp);
- Maximum rated power for continuous braking: 250kW(335hp);
- Electric retarder brake, parking brake and standard reversing brake;
- The brake system conforms to ISO 3450.

Steering

- Independent hydraulic steering with closed-center steering valve, pressure compensating piston pump and accumulator. Accumulator provides uniform steering regardless of engine speed. In the event of loss of engine power, it provides emergency power to system for steering;
- Min. turning radius: 13,000mm;
- The steering system meets the SAE1151/5010 standard.

Tires

- Standard: 18.00R35;
- Specification of wheel rim: 33-13.00/2.5;
- Under certain working conditions, TKPH(ton-Km/h) capabilities of standard tires could be exceeded. Please kindly consult tire manufacturers for optimum tire selection.

Frame

- Dual variable-section box structures welded from high-strength alloy steel plates and steel castings, integrated with the FOPS/ROPS structures to achieve excellent bending capacity, strong distortion resistance, enduring impact ductility and extended life.

Suspension

- Independent front suspension. The smaller swing arm motion reduces the lateral displacement of tires and prolongs the lives of tires. It features extended life and maintenance period.
- Front suspension travel: 160mm (6.3 in);
- Rear suspension travel: 140mm (5.5 in).

Hoist

- Independently hydraulic system with retarders at limiting positions. Two 3-section hoist cylinders are mounted on both sides of the frame rails to keep stable of body while raises the body.
- Body hydraulic pump flow rate: (1,900rpm)323L/min (85USgal/min);
- Liftings ≤ 20s, Lowerings ≤ 19s.

Body

- The body is U- structure. The side plates are constructed from extra wide high tensile strength abrasion-resistant steel. The body is highly impact resistance and needs lower load height. Tilted angle 48°;
- Standard thickness: Floor: 16mm; Side: 10mm; Front: 10mm;
- Struck: 44m³(58yd³);
- Heaped 2:1 (SAE std): 61m³(80yd³).

Cab

- FOPS/ROPS certified. Equipped with integral four-pillar tipping protection design, adjustable cushioned seat, luxury upholstery, and tiltable and telescopic steering wheel to provide a comfortable operating space;
- The cab conforms to the requirements of ISO 3471. The cab provides a sound exposure Leq (equivalent sound level) of less than 78 dB(A) when tested with doors and windows closed.